

**716F-LCF12-C03**

7-16 DIN Female Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications. The 7-16 connector is the most rugged RF connection meeting all requirements even under the most severe environmental conditions.

**FEATURES / BENEFITS**

- Cost effective two-piece design for safe and easy installation
- Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down
- Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up reduces the number of dropped calls and avoids revenue losses
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 68 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



716F-LCF12-C03

[External Document Links](#)[Notes](#)[Installation instruction](#)**Technical features****GENERAL SPECIFICATIONS**

Transmission Line Type		Coaxial Cable		
Cable Size		1/2		
Cable Type		Foam Dielectric		Radiating
Model Series		LCF12-50 Series	ICA12-50 Series	RCF12-50 Series
Connector Interface		7-16 DIN		
Connector Type		OMNI FIT™ Standard		
Sealing Method		O-ring		
Gender		Female		

**ELECTRICAL SPECIFICATIONS**

Nominal Impedance, ohms	Ohm	50
3rd Order IM Product @ 2x20 Watts	dBc	-157 ; typical -160
Maximum Frequency	GHz	6.0
VSWR, Return Loss	VSWR (dB)	0 &lt; f ≤ 1.0 GHz: 1.03 (36.6) 1.0 &lt; f ≤ 2.7 GHz: 1.04 (34.1) 2.7 &lt; f ≤ 3.7 GHz: 1.08 (28.3) 3.7 &lt; f ≤ 5.0 GHz: 1.15 (23.1) 5.0 &lt; f ≤ 6.0 GHz: 1.25 (19.1)

**716F-LCF12-C03**

7-16 DIN Female Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

## MECHANICAL SPECIFICATIONS


<b>Plating Outer/Inner</b>		Trimetal/Silver
<b>Length</b>	mm (in)	51.8 (2)
<b>Outer Diameter</b>	mm (in)	29 (1.14)
<b>Inner Contact Attachment</b>		Spring Finger
<b>Outer Contact Attachment</b>		Spring C-Ring

## ACCESSORIES

Wrench size front	mm (in)	20 (0.79)
Wrench size rear	mm (in)	20 (0.79)
Trimming Tool		TRIM-SET-L12-C02

## TESTING AND ENVIRONMENTAL

Waterproof Level	IP68
------------------	------

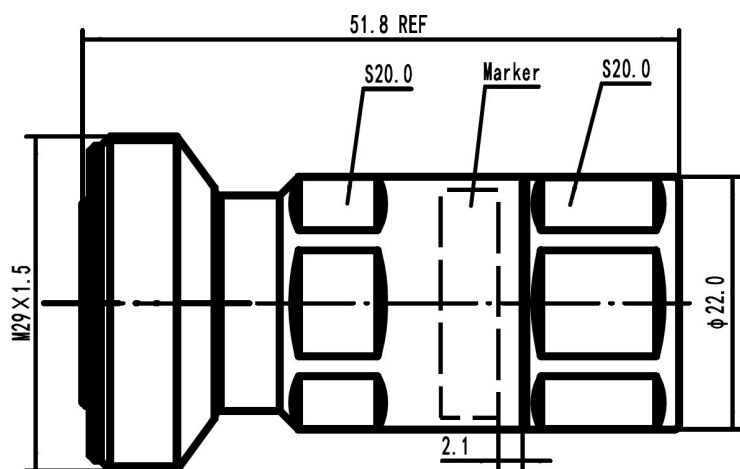

716F-LCF12-C03 Outline drawing