


**716F-R-NF**

Coaxial Adapter 7-16 Female - N Female with right angle

Coaxial Adapter 7-16 Female - N Female with right angle

FEATURES / BENEFITS

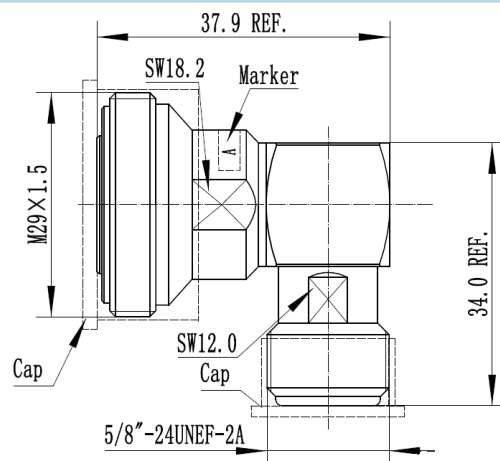

External Document Links

Notes

Technical features**STRUCTURE**

| | | |
|--------------|--|--------------------------|
| Product Line | | Coaxial Cable Components |
| Product Type | | Coaxial Adapter |

MECHANICAL SPECIFICATIONS

| | | |
|----------------------------|--|--------------------------------|
| Connector A | | 7-16 Female |
| Center Contact Connector A | | Phosphor Bronze, silver plated |
| Outer Contact Connector A | | Brass, Tri metal alloy plated |
| Connector B | | N Female |
| Center Contact Connector B | | Phosphor Bronze, silver plated |
| Outer Contact Connector B | | Brass, Tri metal alloy plated |
| Dielectric | | PTFE |
| Sealing class | | IP68, connected |

ELECTRICAL SPECIFICATIONS

| | | |
|-----------------------------------|-----------|--|
| Frequency Range - MHz | | DC - 6000 |
| VSWR, Return Loss | VSWR (dB) | DC TO 2 GHz VSWR 1.05 (32.25) 2 TO 3 GHz VSWR 1.08 (28.3) 3 TO 6 GHz VSWR 1.12 (24.94) |
| Insertion Loss, dB (Max) | dB | 0.05 |
| 3rd Order IM Product @ 2x20 Watts | dBc | < -163 |

TEMPERATURE SPECIFICATIONS

| | | |
|-----------------------|---------|------------------------|
| Operation Temperature | °C (°F) | -40 to 85 (-40 to 185) |
|-----------------------|---------|------------------------|

PACKAGING INFORMATION

| | | |
|------------------|--|---|
| Package Quantity | | 1 |
|------------------|--|---|