PRODUCT DATASHEET


# CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

Clic Clamp, 1/2" ALF,RCF,RLK polyamide black, halogen free
fire class UL94HB

**FEATURES / BENEFITS**

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

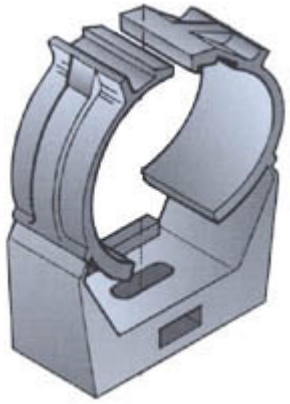

clic_clamp_TI

## Technical features

### GENERAL SPECIFICATIONS

| | | |
|---|---|---|
| **Product Line** | | Radiating Cable Accessories |
| **Product Type** | | Hanger |
| **Hanger Type** | | Clic clamp |
| **Transmission Line Type** | | ALFU<br>RLK*<br>RCF12-50*A<br>HCA12-50<br>RHCA12-50 |
| **Cable Type** | | Air Dielectric<br>Radiating Cable |
| **Color** | | Black |

### MECHANICAL SPECIFICATIONS

| | | |
|---|---|---|
| **Cable Size** | | 1/2 |
| **Number of Cable / Waveguide Runs** | | 1 |
| **Material** | | Polyamide |

### TESTING AND ENVIRONMENTAL

| | | |
|---|---|---|
| **Fire Class** | | UL94 HB |

### TEMPERATURE SPECIFICATIONS

| | | |
|---|---|---|
| **Installation Temperature** | °C (°F) | -20 to 80 (-4 to 176 ) |
| **Operation Temperature** | °C (°F) | -50 to 85 (-58 to 185 ) |
| **Storage Temperature** | °C (°F) | -50 to 85 (-58 to 185 ) |

### PACKAGING INFORMATION


| | | |
|---|---|---|
| **Package Quantity** | | 500 |



All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

# CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

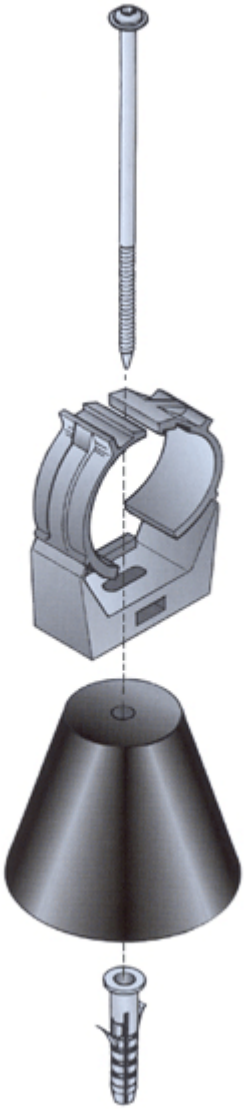




All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

# CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

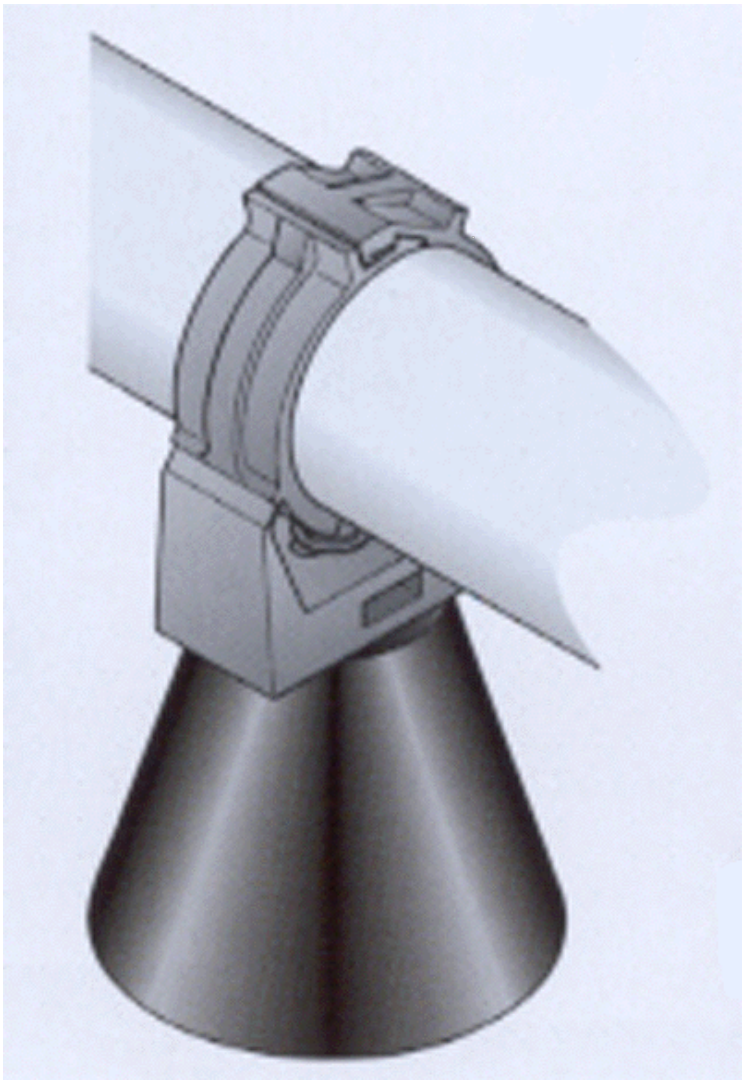

**External Document Links**

**Notes**

* valid for all cable versions



All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering