PRODUCT DATASHEET

COLD-022

Cold shrink tube, 1/2" to 1-1/4", 1/2" to 1-5/8", 5/8" to 1-1/4", 5/8" to 1-5/8", 7/8" to 1 1/4", 7/8" to 1 5/8"

RFS Technologies cold shrink tubes provide a additional sealing of feeder connections.
With the included foam strips a sealing class IP68 is guaranteed
even with scratches on the jacket surface.
The materials are selected for a long-term outdoor use.



FEATURES / BENEFITS

- RFS Technologies offers a timesaving and easy way to secure a waterproof protection.
- No tools are necessary for installation.
- The shrinking process is done by simply unwinding a removable core.

External Document Links

Installation Instruction

Notes

Technical features

STRUCTURE

Product Line		Coaxial Cable Accessories
Product Type		Weather Seal Kit
Coaxial Cable Type		Foam Dielectric

MECHANICAL SPECIFICATIONS

Mated to Cable Size and Interface		1/2" to 1-1/4", 1/2" to 1-5/8", 5/8" to 1-1/4", 5/8" to 1-5/8", 7/8" to 1 1/4", 7/8" to 1 5/8" up to and including 7-16 DIN connectors
Color		Black
Material		Cold shrink tube: Made of EPDM rubber Foam strips: Made of self bonding Foam PE
Sealing Class		IP68
Length	mm (in)	330 (13)

TEMPERATURE SPECIFICATIONS

Operation Temperature, °C°F)	°C(°F)	-50 to 100 (-58 to 212)
Storage Temperature	°C(°F)	-50 to 100 (-58 to 212)


PACKAGING INFORMATION

Package Quantity		1

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

COLD-022

Cold shrink tube, 1/2" to 1-1/4", 1/2" to 1-5/8", 5/8" to 1-1/4", 5/8" to 1-5/8", 7/8" to 1 1/4", 7/8" to 1 5/8"

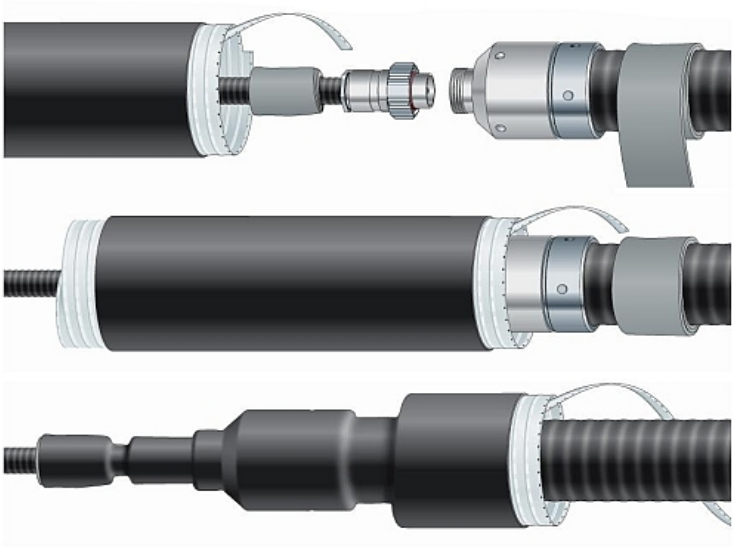

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering