PRODUCT DATASHEET

HA-DCPLUG-LI-xx Series

HYBRIFLEX® DC Connector Splitter for Low Inductance, Concentric Power Wire Kit

RFS' patented DC wire insulator. Specially designed for Low Inductance, coaxial/concentric, DC wire installation in junction boxes and other applications. Allows for consistant and safe termination of these special wire types in various types of terminal block connectors.



FEATURES / BENEFITS

- Avoids short circuits when using Low Inductance wire
- Made of flexible material for easier installation
- Included with many of the the "LI" type HYBRIFLEX cables from RFS
- Also offered separately in muti-piece kits

External Document Links
Installation Guidelines

Notes

Technical features

GENERAL SPECIFICATIONS

Product Type		Power Wire Splitter Connector

MECHANICAL SPECIFICATIONS

Material		PVC
Weight	kg (lb)	0.003 (0.007)
Dimensions Power Connector (LxWxD)	mm (in)	13.6 x 15.4 x 51.9 (0.54 x 0.61 x 2.04)

TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 75 (-40 to 167)
Operation Temperature	°C (°F)	-40 to 75 (-40 to 167)
Installation Temperature	°C (°F)	-40 to 75 (-40 to 167)
UV-Protection		Yes


ELECTRICAL SPECIFICATIONS


Supported Wire Cross Section		6 AWG

ADDITIONAL INFORMATION

Kit Model	Quantity Provided in Kit
HA-DCPLUG-LI-06	6
HA-DCPLUG-LI-14	14

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

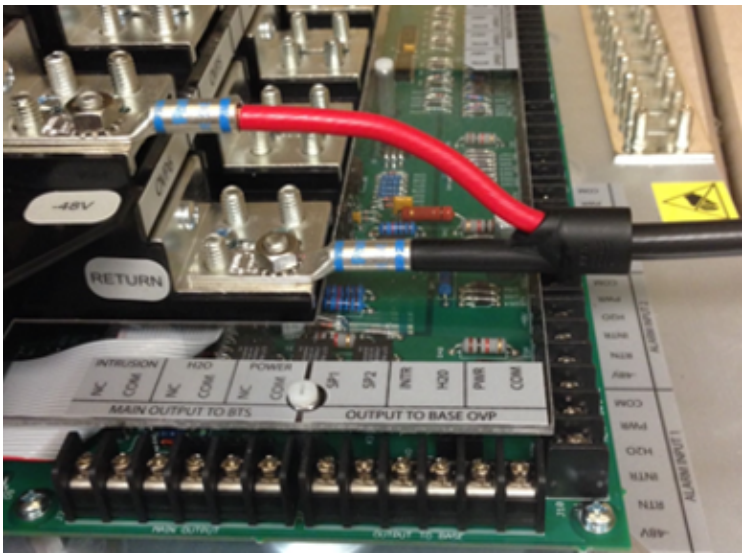

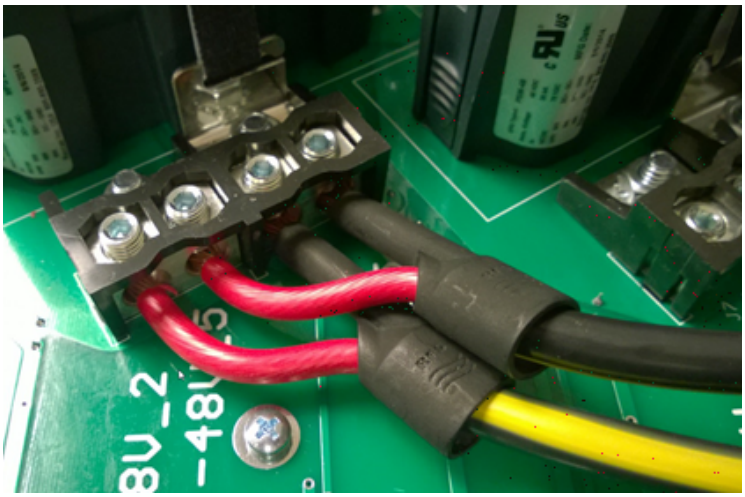

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering