PRODUCT DATASHEET

HA-FOPLUG-A-04

Field Installable FullAXS Compatible Connector

Ideal for adapting HYBRIFLEX Hybrid or Fiber Only jumpers to equipment requiring a FullAXS compatible optical fiber interconnect. Easily installed over factory LC fiber termination and seals on fiber OD. Dust cap included to seal unused fiber terminations.



FEATURES / BENEFITS

- Cost effective solution
- IP67 rated

External Document Links

Installation Guidelines

Notes

Technical features

MECHANICAL SPECIFICATIONS


Material		Plastic Shell with Rubber Oring
Mating Cycles		100
Dust Cap		Yes

TESTING AND ENVIRONMENTAL

Operation Temperature	°C (°F)	-40 to 85 (-40 to 185)
Sealing Class		IP67
UV-Protection		Yes

F/O CABLE SPECIFICATIONS

Supported Fiber Type		Single or Multi Mode with 5mm OD
Mating Face		FullAXS Plug
Standard		RoHS Compliant

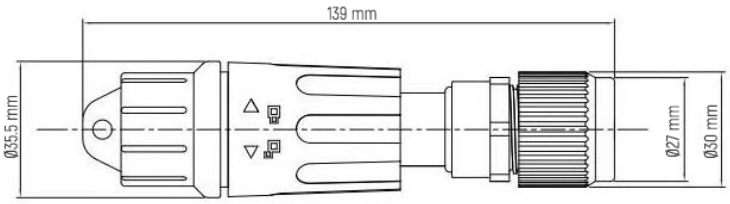

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering