

HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m

PRODUCT DESCRIPTION

RFS Technologies' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites.

HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It eliminates the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS Technologies CELLFLEX® accessories can be used with HYBRIFLEX cable. Both pre-connectorized and on-site options are available.



FEATURES / BENEFITS

- · Aluminum corrugated armor with outstanding bending characteristics Minimizes installation time and enables mechanical protection and shielding
- Armored fiber optic breakout Preserves the integrity of the fiber and provides mechanical/environmental protection
- Same accessories as 1-5/8" coaxial cable
- Outer conductor grounding Utilizes same grounding methods as coaxial cable
- Lightweight solution and compact design Decreases tower loading
- Robust cabling Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- Outdoor, black PE jacket Ensures long-lasting cable protection
- · Shielded DC wire Jacketed and braided cable on top breakout provides grounding and EMI protection
- · Maximum robustness Fully armored cable includes riser trunk and top outdoor breakout

TECHNICAL FEATURES

CTDIICTIIDE

SIRUCTURE					
Cable Type		HYBRIFLEX®			
Size		1-5/8"			
Length	m (ft)	40 (131.2)			
MECHANICAL SPECIFICATIONS					
Outer Diameter Nominal	mm (in)	50.7 (1.996)			
Cable Weight	kg/m (lb/ft)	3.42 (2.3)			
Minimum Bending Radius, Single Bend	mm (in)	254 (10)			
Minimum Bending Radius, Multiple Bends	mm (in)	508 (20)			
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)			

HB158-21U6S24-40M REV : G REV DATE : 16 Feb 2021 www.rfstechnologies.com



HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m

Armor Type		Corrugated Aluminum			
Maximum DC-Resistance of	Ω/km (Ω/kft)	0.58 (0.178)			
Diameter Corrugated Armor	mm (in)	46.4 (1.83)			
Tunneser cerragates / Inner	()	.61.(1.65)			
ABLE JACKET					
JV-Protection Individual and external Jacket		Yes			
OC POWER CABLE SPECIFICATIONS					
lumber of DC Pairs		6			
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	0.83 (0.25)			
ross Section of Power Cable	mm² (AWG)	21.1 (4)			
OC Wire Jacket Material		PVC/Nylon			
OC Cable Single Bending Radius	mm (in)	157 (6.2)			
OC Cable Diameter	mm (in)	7.8 (0.308)			
OC Standards (Meets or Exceeds)		For use in UL 1569, PVC Nylon, RoHS/REACH Compliant			
Break-out Length (Top)	mm (in)	5000 (197)			
Break-out Length (Bottom)	mm (in)	2000 (78)			
OC Cable Sealing Method		Semi-rigid flame-retardant polyolefin, with hot melt adhesive			
O CABLE SPECIFICATIONS					
/O Cable Type		G657-A1 Single Mode, Bend Tolerant			
lumber of F/O Pairs		24			
ore/Clad	μm	9/125			
econdary Protection Nominal	μm (in)	900 (0.035)			
ingle Bending Radius	mm (in)	157 (6.2)			
able Diameter		5.512 (0.217)			
/O Standards (Meets or Exceeds)		UL Listed Type OFNR (UL1666), RoHS Compliant			
Optical Loss	dB/Km	0.5 @ 1310 nm 0.5 @ 1550 nm			
iber Termination End 1		ODC plug			
iber Termination End 2		DLC connector			
O Break-out Length (Top)	mm (in)	5000 (197)			
O Break-out Length (Bottom)	mm (in)	1000 (39)			
able Sealing Method		Semi-rigid flame-retardant polyolefin, with hot melt adhesive			
ESTING AND ENVIRONMENTAL					
torage Temperature	°C (°F)	-40 to 70 (-40 to 158)			
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)			
nstallation Temperature	°C (°F)	-20 to 65 (-4 to 149)			

HB158-21U6S24-40M REV: G REV DATE: 16 Feb 2021 www.rfstechnologies.com



HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m


ASSEMBLY LOSS					
Optical Insertion Loss, Riser or umper Tested Individually	Riser or Jumper	11.4 dB tVn(ca) (0) 13.111/1550nm			
YSTEM LOSS					
Optical Insertion Loss, Riser and umper Connected in Series	Total, End to End	0.7dB typical / 1.25dB max @1310/1550nm			

HB158-21U6S24-40M REV: G REV DATE: 16 Feb 2021 www.rfstechnologies.com



HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m

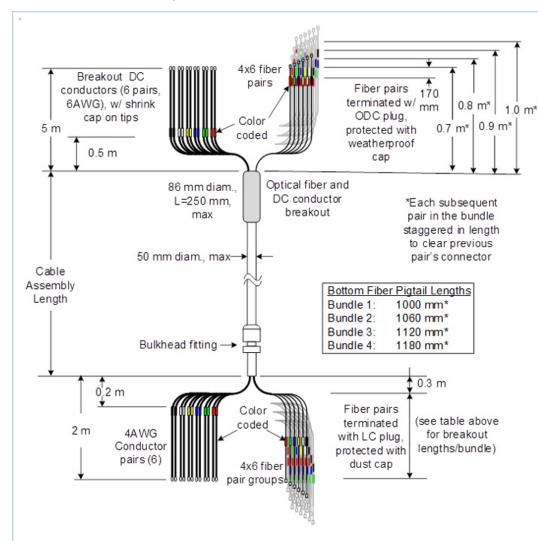

6x24				
Second Color	First Color	Fiber Pair		
	Red	1		
	Green	2		
No Second Band	Blue	3		
No Second Band	Yellow	4		
	White	5		
	Black	6		
	Red	7		
	Green	8		
White	Blue	9		
winte	Yellow	10		
	White	11		
	Black	12		
	Red	13		
	Green	14		
Green	Blue	15		
Green	Yellow	16		
	White	17		
	Black	18		
	Red	19		
	Green	20		
Pluo	Blue	21		
Blue	Yellow	22		
	White	23		
	Black	24		

EXTERNAL DOCUMENT LINKS

On-line Factory Test Results: <u>View</u>

NOTES

Nominal length equals length of trunk not including top and bottom breakouts; breakout lengths add additionally to the total assembly length

Top Breakout - DC Power Cable Specifications:




HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m

- No of DC pairs 6; Specifications per 1 pair:
- Maximum DC-Resistance Power Cable Ω/km (Ω/ft) 1.4 (0.42),
- Cross Section of Power Cable mm2 (AWG) 13.3 (6),
- Overall Cable Diameter mm (in) 17.8 (0.708),
- DC Cable Jacket Material PVC,
- EMI Shield Tinned Copper Braid

ADDITIONAL ASSEMBLY LENGTHS

Length (m)	Model Number
10	HB158-21U6S24-10M
20	HB158-21U6S24-20M
30	HB158-21U6S24-30M
40	HB158-21U6S24-40M
50	HB158-21U6S24-50M
60	HB158-21U6S24-60M
70	HB158-21U6S24-70M
80	HB158-21U6S24-80M
90	HB158-21U6S24-90M
100	HB158-21U6S24-100M
110	HB158-21U6S24-110M
120	HB158-21U6S24-120M
130	HB158-21U6S24-130M

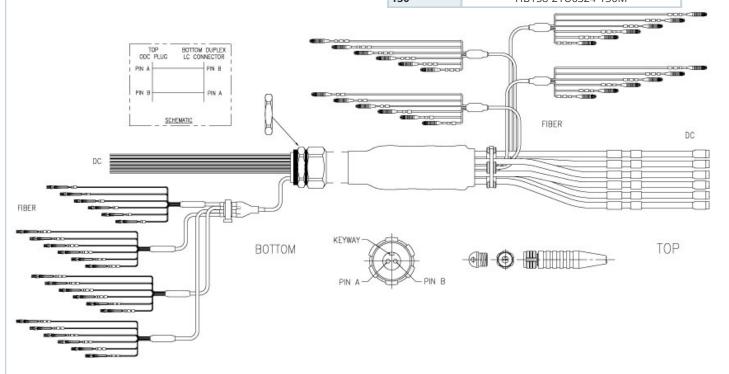

PRE-PACKED HYBRIFLEX KITS FOR QUICK AND EASY FIELD INSTALLS

All Kits include an above cable assembly plus predefined quantities of grounding kit(s) and hoisting grip(s)

HB158-21U6S24-40M REV : G REV DATE : 16 Feb 2021 www.rfstechnologies.com



HB158-21U6S24-40M

HYBRIFLEX® Hybrid Feeder Cabling Solution 6x24, 4AWG, 1-5/8", Single-Mode Fiber, DLC to ODC, with 6AWG DC breakout top, 40 m

KIT ASSEMBLY LENGTHS

Length (m)	Model Number	Grounding Kit	GK Qty	Hoisting Grip	HG Qty
10	HB158-21U6S24-10M-KIT		3		1
20	HB158-21U6S24-20M-KIT		3		1
30	HB158-21U6S24-30M-KIT	3158-21U6S24-30M-KIT			1
40	HB158-21U6S24-40M-KIT		3		1
50	HB158-21U6S24-50M-KIT		3		1
60	HB158-21U6S24-60M-KIT		3		2
70	HB158-21U6S24-70M-KIT	GKFORM60-158	4	HOIST1-158L	4
80	HB158-21U6S24-80M-KIT		4		4
90	HB158-21U6S24-90M-KIT		4		4
100	HB158-21U6S24-100M-KIT		5		4
110	HB158-21U6S24-110M-KIT		5		4
120	HB158-21U6S24-120M-KIT		5		4
130	HB158-21U6S24-130M-KIT		6		6

HB158-21U6S24-40M REV: G REV DATE: 16 Feb 2021 www.rfstechnologies.com