

#### HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

#### PRODUCT DESCRIPTION

RFS Technologies' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It may eliminate the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS Technologies CELLFLEX® accessories can be used with HYBRIFLEX cable.

# UL

#### **FEATURES / BENEFITS**

- Aluminum corrugated armor with outstanding bending characteristics Minimizes installation time and enables mechanical protection and shielding
- Outer conductor grounding Saves on installation costs
- · Lightweight solution and compact design Decreases tower loading
- Robust cabling Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- UL-Listed, flame-retardant jacket, UV protected assembles Allows both indoor and outdoor applications
- 100% Factory tested Online test results available

#### **TECHNICAL FEATURES**

#### **STRUCTURE**

Cable Type		HYBRIFLEX®
Fire Performance		Flame Retardant
Size		1/2
Length	m (ft)	21.3 (70)

#### **MECHANICAL SPECIFICATIONS**

Outer Diameter Nominal	mm (in)	15.8 (0.62)
Cable Weight	kg/m (lb/ft)	0.36 (0.24)
Minimum Bending Radius, Single Bend	mm (in)	76.2 (3)
Minimum Bending Radius, Multiple Bends	mm (in)	127 (5)
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)

### **CABLE JACKET**

UV-Protection Individual and	vidual and	Voc
External Jacket		Yes



# HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

Armor Type		Corrugated Aluminum
Maximum DC-resistance of Armor		2.4 (0.73)
Diameter Corrugated Armor		13.8 (0.55)
DC POWER CABLE SPECIFICATIONS		
Number of DC Pairs		1
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	3.41 (1.04)
Cross Section of Power Cable	mm² (AWG)	5.3 (10)
DC Wire Jacket Material		PVC/Nylon
DC Cable Single Bending Radius	mm (in)	83 (3.3)
DC Cable Diameter	mm (in)	4.2 (0.165)
DC Standards (Meets or Exceeds)		For use in Type MC per UL 1569, PVC Nylon, RoHS/REACH Compliant
Break-out length (Top)	mm (in)	559 (22)
Break-out length (Bottom)	mm (in)	914 (36)
DC cable sealing method		Semi-rigid, flame-retardant polyolefin, with hot melt adhesive
F/O CABLE SPECIFICATIONS		
Number of F/O Strands		2
F/O Cable Type		G657-A2 Single Mode, Bend Tolerant
Core/Clad	μm	9/125
Single Bending Radius	mm (in)	83 (3.3)
F/O Standards (Meets or Exceeds)		UL Listed Type OFNR (UL1666), RoHS Compliant
Optical Loss	dB/Km	0.5 @ 1310 nm 0.5 @ 1550 nm
FO Break-out Length (Top)	mm (in)	584 (23)
FO Break-out Length (Bottom)	mm (in)	965 (38)
Cable Sealing Method		Semi-rigid flame-retardant polyolefin, with hot melt adhesive
Fiber Termination End 1		LC Connector
Fiber Termination End 2		LC Connector
TESTING AND ENVIRONMENTAL		
Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)
Installation Temperature	°C (°F)	-20 to 65 (-4 to 149)
Jacket Specifications		UL1569 Type MC, UL Listed

Installation Guidelines: <u>Download</u>


QuickShip 2.0 Program Information: Download

On-line Factory Test Results: View



# HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

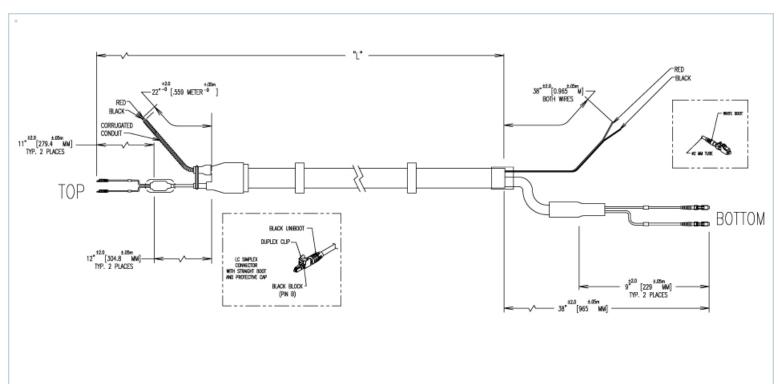



# HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

#### **ADDITIONAL ASSEMBLIES - 1 PAIR SM FIBER**

Length, ft	Model Number
10	HBF012-05U1S1-10F
20	HBF012-05U1S1-20F
30	HBF012-05U1S1-30F
40	HBF012-05U1S1-40F
50	HBF012-05U1S1-50F
60	HBF012-05U1S1-60F
70	HBF012-05U1S1-70F
80	HBF012-05U1S1-80F
90	HBF012-05U1S1-90F
100	HBF012-05U1S1-100F

# **ADDITIONAL ASSEMBLIES - 2 PAIR SM FIBER**

Length, ft	Model Number
10	HBF012-05U1S2-10F
20	HBF012-05U1S2-20F
30	HBF012-05U1S2-30F
40	HBF012-05U1S2-40F
50	HBF012-05U1S2-50F
60	HBF012-05U1S2-60F
70	HBF012-05U1S2-70F
80	HBF012-05U1S2-80F
90	HBF012-05U1S2-90F
100	HBF012-05U1S2-100F



# HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

#### **ADDITIONAL ASSEMBLIES - 2 STRAND SM FIBER**

Length, ft	Model Number
10	HBF012-05U1SS2-10F
20	HBF012-05U1SS2-20F
30	HBF012-05U1SS2-30F
40	HBF012-05U1SS2-40F
50	HBF012-05U1SS2-50F
60	HBF012-05U1SS2-60F
70	HBF012-05U1SS2-70F
80	HBF012-05U1SS2-80F
90	HBF012-05U1SS2-90F
100	HBF012-05U1SS2100F



# HBF012-05U1SS2-70F

HYBRIFLEX® RRH Hybrid Jumper, 1/2", 1 pair 10AWG, 2 Single Strand, Single-Mode Fiber with LC Connectors, 70 ft

# PRE-PACKED HYBRIFLEX KITS FOR EASY INTEGRATION INTO RAYCAP JUNCTION BOXES

RFS Technologies now offers Kitting options for most hybrid risers and jumpers that include both the cable assembly and the Raycap inserts. For reference, kits have a "K" as the third digit in the model number. HB158 does not require an additional gland/insert for proper installation and sealing into the Distribution Boxes.

Kit Model Prefix	Assembly Prefix	Assembly Qty	Raycap Insert Kit	Insert Kit Contents	Raycap Insert Kit Qty
HBK114	HB114	1	RFS Technologies- TRUNK-KIT	(2) 190 0620, Insert, M75, 1H, 40mm	
HBK058	HBF058		RFS Technologies- JUMP-KIT	(1) 190 0621, Insert, M75, 3H, 22mm, Split w/ plugs	4
HBK012	HBF012		RFS Technologies- JUMP-KIT-2	(1) 190 0903, Insert, M75, 2H, 15mm, Split w/ plugs	1
FRK-N	FR-N		RFS Technologies- FIBER-KIT	(1) 190 0657, Insert, M75, 6H, 6.1mm, Split w/ plugs	