

**HCH-495-1R**

Cable hanger for Air Dielectric Cable

Hangers for the installation of Air Dielectric Cables on different supporting profiles.

Cable Clamp and Extended Counterbed hot-galvanized steel

Screw: stainless steel.

FEATURES / BENEFITS

picture shows the 1L4 version
for illustration purpose only

Technical features**GENERAL SPECIFICATIONS**

| | | |
|------------------------|--|-------------------------------|
| Product Line | | Coaxial Cable Accessories |
| Product Type | | Hanger |
| Hanger Type | | Flat iron 6-12mm (0.24-0.47") |
| Transmission Line Type | | HCA495 |
| Cable Type | | Air Dielectric |

MECHANICAL SPECIFICATIONS

| | | |
|-------------------------------------|--------|--|
| Cable Size | | 5 |
| Material | | Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel |
| Recommended / Maximum Clamp Spacing | m (ft) | 1 / 2 (3.3 / 6.6) |

TEMPERATURE SPECIFICATIONS


| | | |
|-----------------------|---------|-------------------------|
| Operation Temperature | °C (°F) | -50 to 85 (-58 to 185) |
| Storage Temperature | °C (°F) | -50 to 85 (-58 to 185) |

PACKAGING INFORMATION


| | | |
|------------------|--|---|
| Package Quantity | | 1 |
|------------------|--|---|

HCH-495-1R

Cable hanger for Air Dielectric Cable

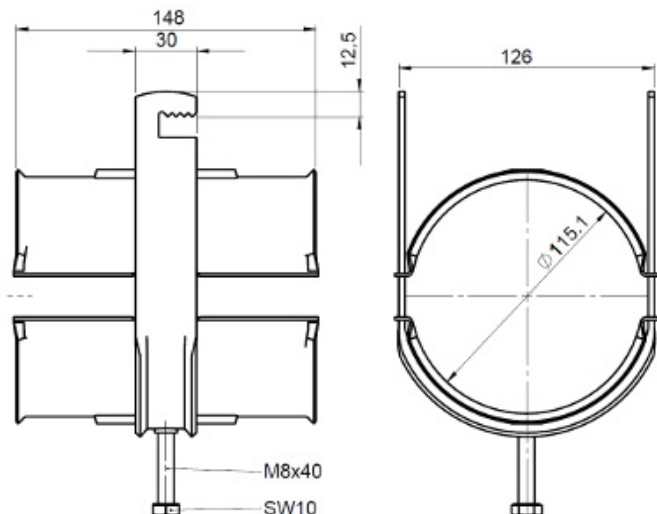

HCH Clamps available for different types of interfaces:




Type C

For anchor bar
(18-22mm slot)



Type L

For angle iron
(in different sizes)



Type R

For flat iron
(6 – 12 mm)

External Document Links

Notes

Hangers for flat iron 6-12 mm (0.24-0.47")