

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

#### FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



picture shows MBHS78-2-F for illustration purpose

[External Document Links](#)
[Notes](#)
[Installation Instruction](#)

## Technical features

#### GENERAL SPECIFICATIONS

|                        |  |   |
|------------------------|--|---|
| Product Line           |  | Coaxial Cable Accessories<br>Hybrid Cable Accessories |
| Product Type           |  | Hanger  |
| Hanger Type            |  | Single Multi-block                                    |
| Transmission Line Type |  | LCF12<br>HCA12-50<br>HB012                            |
| Cable Type             |  | Coaxial Foam Dielectric<br>Hybrid                     |
| Color                  |  | Black   |

#### MECHANICAL SPECIFICATIONS

|   |         |   |
|---|---------|---|
| Cable Size                                  |         | 1/2   |
| Number of Cable / Waveguide Runs            |         | 1 per layer, 2 layers, 2 runs                               |
| Configuration                               |         | incl. Angle member adapter                                  |
| Angle member adapter clamping range mm (in) |         | 4 / 24 (0.157 / 0.945 )                                     |
| Angle member adapter threads                |         | 2x M8   |
| Material                                    |         | Metal part: Stainless steel<br>Plastic parts: Polypropylene |
| Length                                      | mm (in) | 155 (6.10) see picture below (L)                            |
| Height                                      | mm (in) | 50 (1.96) see picture below (H)                             |
| Width                                       | mm (in) | 50 (1.96) see picture below (W)                             |
| Recommended / Maximum Clamp Spacing         | m (ft)  | 0.6 / 1 (2 / 3.25)  |



## MBHS12-2-F


Single Multi-block hanger two layer, with angle member adapter

### TEMPERATURE SPECIFICATIONS

|                       |         |                         |
|-----------------------|---------|-------------------------|
| Operation Temperature | °C (°F) | -50 to 85 (-58 to 185 ) |
| Storage Temperature   | °C (°F) | -50 to 85 (-58 to 185 ) |

### PACKAGING INFORMATION

|                  |         |              |
|------------------|---------|--------------|
| Package Quantity |         | 10           |
| Weight per piece | kg (lb) | 0.178 (0.39) |
| Weight per kit   | kg (lb) | 2 (4.41)     |

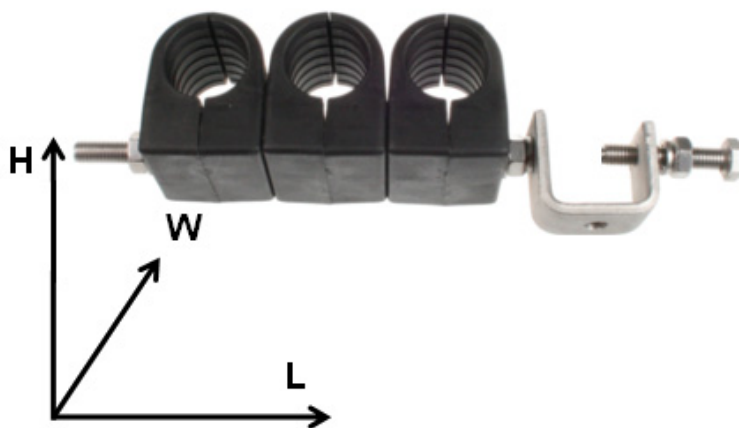

picture shows MBHS78-3-F for illustration purpose