

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



MBHS78-3-F

[External Document Links](#)
[Notes](#)
[Installation Instruction](#)

Technical features

GENERAL SPECIFICATIONS

Product Line		Coaxial Cable Accessories Hybrid Cable Accessories
Product Type		Hanger
Hanger Type		Single Multi-block
Transmission Line Type		UCF78 LCF78 HB078
Cable Type		Coaxial Foam Dielectric Hybrid
Color		Black

MECHANICAL SPECIFICATIONS

Cable Size		7/8
Number of Cable / Waveguide Runs		1 per layer, 3 layers, 3 runs
Configuration		incl. Angle member adapter
Angle member adapter clamping range mm (in)		4 / 24 (0.157 / 0.945)
Angle member adapter threads		2x M8
Material		Metal part: Stainless steel Plastic parts: Polypropylene
Length	mm (in)	234 (9.21) see picture below (L)
Height	mm (in)	70 (2.73) see picture below (H)
Width	mm (in)	50 (1.96) see picture below (W)
Recommended / Maximum Clamp Spacing	m (ft)	0.8 / 1 (2.75 / 3.25)

**MBHS78-3-F**


Single Multi-block hanger three layer, with angle member adapter

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)

PACKAGING INFORMATION

Package Quantity		10
Weight per piece	kg (lb)	0.288 (0.63)
Weight per kit	kg (lb)	3.1 (6.8)

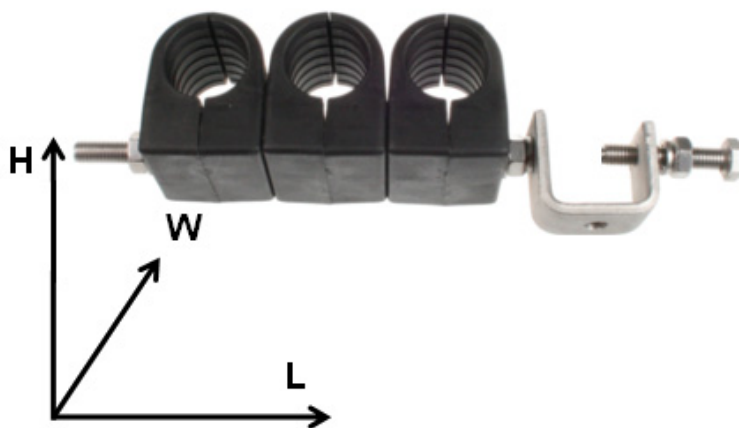

picture shows MBHS78-3-F for illustration purpose