




Coaxial Adapter N male - female, right angle

FEATURES / BENEFITS

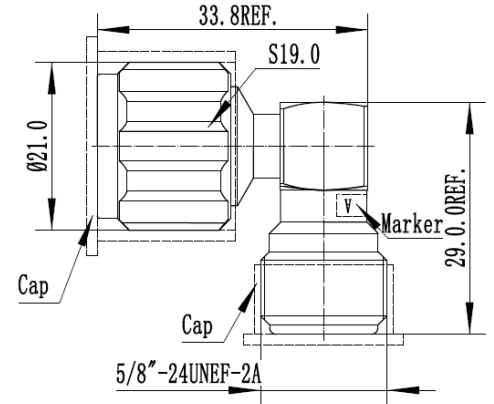

External Document Links

Notes

Technical features

STRUCTURE

| | | |
|---------------------|--|--------------------------|
| Product Line | | Coaxial Cable Components |
| Product Type | | Coaxial Adapter |

MECHANICAL SPECIFICATIONS

| | | |
|-----------------------------------|--|--------------------------------|
| Connector A | | N Male |
| Center Contact Connector A | | Brass, silver plated |
| Outer Contact Connector A | | Brass, Tri metal alloy plated |
| Connector B | | N Angle Female |
| Center Contact Connector B | | Phosphor Bronze, silver plated |
| Outer Contact Connector B | | Brass, Tri metal alloy plated |
| Dielectric | | PTFE |
| Sealing class | | IP68, connected |

ELECTRICAL SPECIFICATIONS

| | | |
|--|-----------|---|
| Frequency Range - MHz | | DC - 6000 |
| VSWR, Return Loss | VSWR (dB) | 0-2000 MHz: 1.05 (32.25) 2000 - 3000 MHz: 1.08 (28.3) 3000 - 6000 MHz: 1.12 (24.94) |
| Insertion Loss, dB (Max) | dB | 0.05 |
| 3rd Order IM Product @ 2x20 Watts | dBc | < -163 |

TEMPERATURE SPECIFICATIONS

| | | |
|------------------------------|---------|------------------------|
| Operation Temperature | °C (°F) | -45 to 85 (-49 to 185) |
|------------------------------|---------|------------------------|

PACKAGING INFORMATION

| | | |
|-------------------------|--|---|
| Package Quantity | | 1 |
|-------------------------|--|---|