PRODUCT DATASHEET

SFS-158-01

Smart Fixing Solution for RADIAFLEX® 1 5/8"

Clic Clamp, 1-5/8" RADIAFLEX polyamide black, halogen free
fire class UL94HB

FEATURES / BENEFITS


Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.




Technical features

GENERAL SPECIFICATIONS		
Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		SFS clamp
Transmission Line Type		RLF* RLK* RLV* RAY*158-50*A RCF158-50*A
Cable Type		Radiating Cable
Color		Black
MECHANICAL SPECIFICATIONS		
Cable Size		1-5/8
Number of Cable / Waveguide Runs		1
Material		Polyamide
TESTING AND ENVIRONMENTAL		
Fire Class		UL94 HB
TEMPERATURE SPECIFICATIONS		
Installation Temperature	°C (°F)	-20 to 80 (-4 to 176)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)
PACKAGING INFORMATION		
Package Quantity		80
Weight per piece	kg (lb)	0.077 (0.17)

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

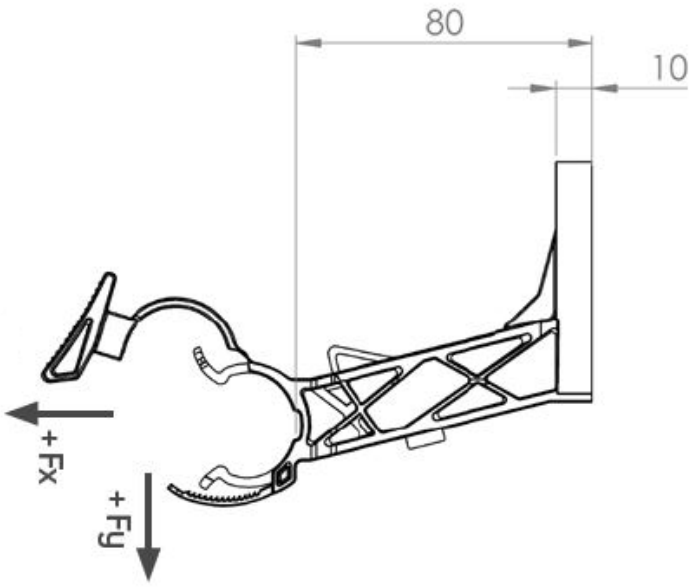

Fx = 300 N ; Fy = 300 N

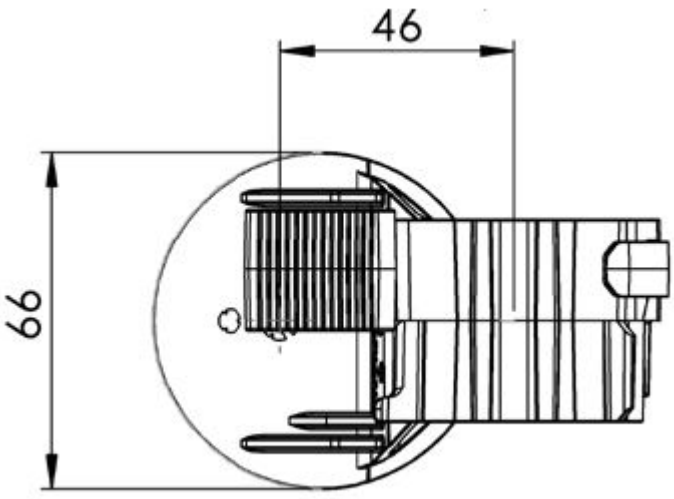

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering