

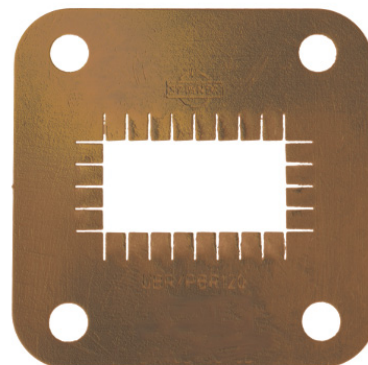


Contact Shim for PBR120

FEATURES / BENEFITS

Waveguide installation

- The shim offers pressure tightness between two gasket sealed flanges
- The shim offers maximum possible RF contact.

**Technical features****STRUCTURE**

| | | |
|---|--|--------------|
| Type of Rectangular Waveguide Component | | Contact Shim |
| Waveguide Size IEC (EIA) | | R120 (WR75) |
| Flange | | UBR120 |
| Flange Finish | | un-plated |
| Package Quantity | | 1 |

ELECTRICAL SPECIFICATIONS

| | | |
|---------------------------------|-----------|-------------|
| Frequency Range | GHz | 9.84 - 15 |
| Minimum Return Loss (max. VSWR) | dB (VSWR) | 46.1 (1.01) |

MATERIAL

| | | |
|----------|--|------------------|
| Material | | Copper beryllium |
|----------|--|------------------|

[External Document Links](#)[Notes](#)