PRODUCT DATASHEET

TER-E-3800-2W

Load, N male, 2 Watt

The N-TER Series are coaxial loads which operate from DC up to 3.8 GHz.The products are ideally suited for termination of unused ports in distributed antenna systems or in RADIAFLEX® radiating cables systems.


NO IMAGE AVAILABLE

FEATURES / BENEFITS

- **Ideal for all kind of DAS applications**
- **Finned termination for optimized heat disspation**
- **Low VSWR**

Technical features

GENERAL SPECIFICATIONS		
Product Type		Load
Techn. Application		Indoor
ELECTRICAL SPECIFICATIONS		
Frequency Range	MHz	DC-3.800
Impedance	Ohm	50
Max. VSWR / Return Loss, dB	VSWR/dB	1.25/19
Total Input Power	W	2
MECHANICAL SPECIFICATIONS		
Input Connector Type		N male
Diameter	mm (in)	18 (0.71)
Length	mm (in)	39 (1.53)
TEMPERATURE SPECIFICATIONS		
Temperature Range	°C (°F)	-25 to 65 (-13 to 149)
Environmental Class		Indoor

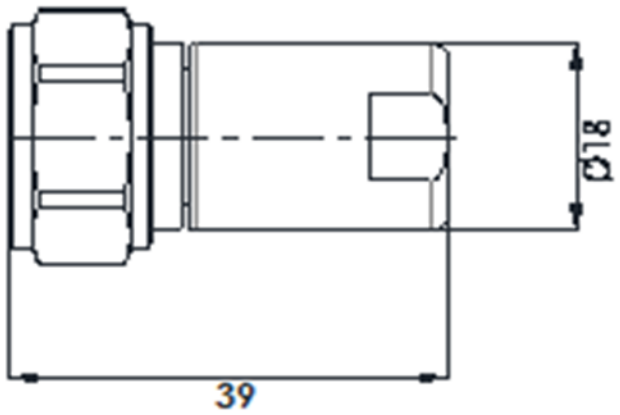

External Document Links

Notes

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering

Derated power by -1.5%/°C above 50°C

All values nominal unless tolerances provided; information contained in the present datasheet is subject to confirmation at time of ordering